









AT 520 ALUMINIUM ENTRANCE DOOR

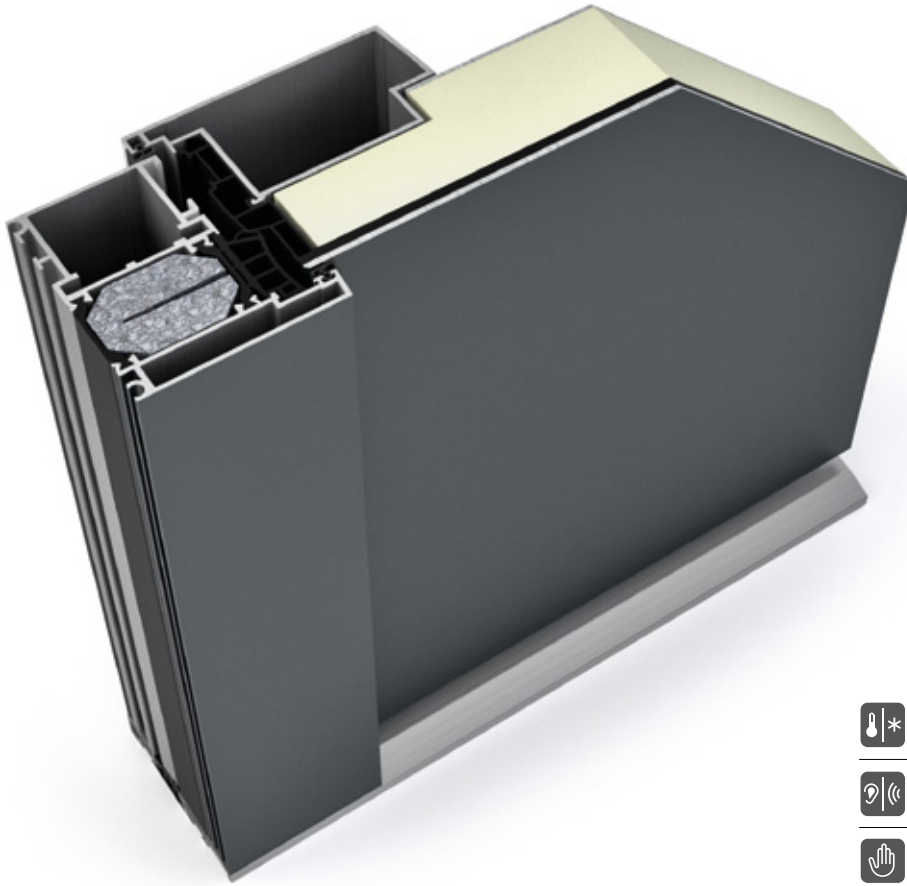


	Thermal insulation	U_D as low as 0.80 W/(m ² K)
	Noise reduction	up to 32 dB
	Security	up to RC2
	Locking	Multi-point locking
	Construction depth	93 mm



Round edge on inside,
square edge on outside



Cavity-filled structure with
expansion insert for thermal
stability

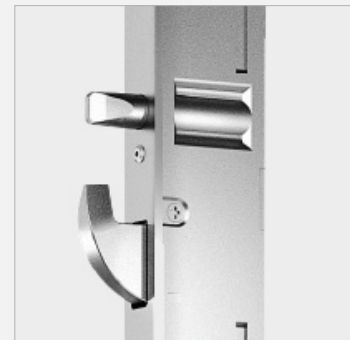


5-lever locking as standard for
highest security


AT 520

Diagram

Section - bottom

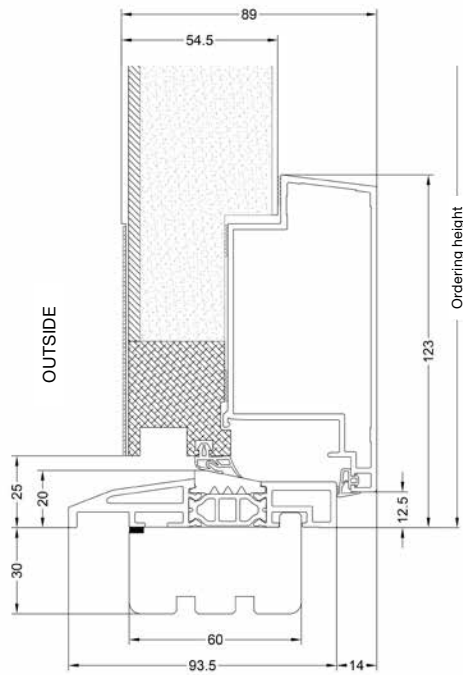

Side section - top

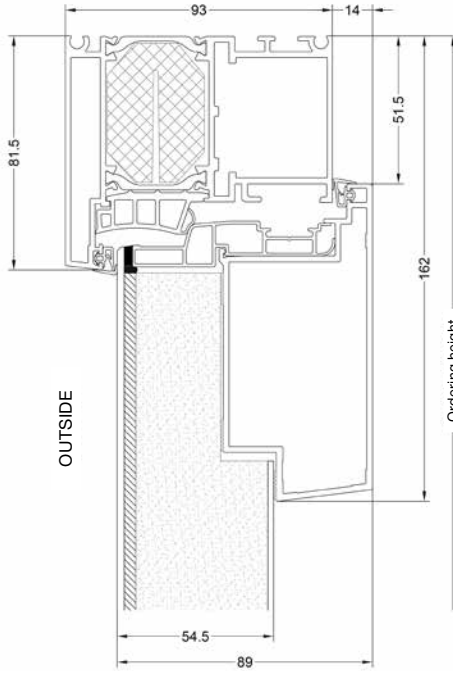

SA
Order No: S0001



SG
Order No: S0003



AD
Order No: A0002



SP
Order No: S0007

Further entrance door options can be found in the Door Designer:



Internorm Fenster GmbH

A-4050 Traun
Ganglgutstraße 131
T +43 (7229) 770-0
office@internorm.com

Internorm Windows UK Ltd

Unit D, Colindale Business Park
2-10 Carlisle Road, NW9 0HN, London
Tel.: +44 (0) 208 205 9991
Email: office@internorm.co.uk